

GENERAL NOTES

THE FOLLOWING NOTES AND ANY OTHER GENERAL NOTES IN THE DRAWINGS ARE GENERAL IN NATURE AND PERTAIN TO THE ENTIRE PROJECT. WHERE THERE ARE EXCEPTIONS, ADDITIONS, OR REVISIONS TO THESE NOTES, SUCH EXCEPTIONS, ADDITIONS OR REVISIONS ARE SO NOTED ON THE PARTICULAR DRAWING WHERE THEY OCCUR. (APPLIES TO ALL PLUMBING (P-) SHEETS).

- LIST OF ABBREVIATIONS, ACRONYMS, AND SYMBOLS IS A STANDARD LIST, NOT ALL SYMBOLS SHOWN ON THE PLUMBING LEGEND MAY BE USED FOR THIS PROJECT.
- ACCESS PANELS ARE REQUIRED IN WALLS, FLOORS, AND SUSPENDED CEILINGS (EXCEPT LAY-IN TYPE) FOR ACCESS TO ALL VALVES, TRAPS, DAMPERS, CLEANOUTS, CONTROLS, SMOKE DETECTORS, ETC. PANELS SHALL BE FURNISHED AND INSTALLED UNDER ARCHITECTURAL SPECIFICATIONS.
- PIPING SHOWN ON THE PLANS ARE DIAGRAMMATIC, AND MAY NOT SHOW ALL BENDS,
 OFFSETS, ROUTING, AND FITTINGS NECESSARY FOR THE INSTALLATION OF THE WORK AS
 INTENDED.
- 4. THE PLUMBING CONTRACTOR SHALL COORDINATE WITH ALL OTHER TRADES IN THE INSTALLATION OF PLUMBING EQUIPMENT AND ALL ASSOCIATED ACCESSORIES, PRIOR TO INSTALLING EQUIPMENT.
- 5. THE CONTRACTOR SHALL LOCATE AND MARK ALL EXISTING UTILITIES ON SITE PRIOR TO GRADING OR EXCAVATION. THIS SHALL BE MAINTAINED THROUGHOUT CONSTRUCTION.
- 6. ALL DIMENSIONS ARE SHOWN IN INCHES UNLESS OTHERWISE NOTED.
- 7. PROVIDE MECHANICAL SLEEVE SEALS FOR PENETRATIONS BELOW GRADE.
- 8. CONCEAL PIPING WHENEVER POSSIBLE UNLESS NOTED OTHERWISE.
- 9. ALL FIXTURES ARE TO BE EQUIPPED WITH STOP VALVES IN AN ACCESSIBLE LOCATION.
- 10. INSTALL ALL EXTERIOR FREEZE PROOF WALL HYDRANTS APPROXIMATELY 20" ABOVE FINISHED GRADE.
- 11. INSTALL ALL INTERIOR HOSE BIBBS APPROXIMATELY 12" ABOVE FINISHED FLOOR.
- 12. PLUMBING FIXTURE AND EQUIPMENT MOUNTING HEIGHTS TO BE AS FOLLOWS UNLESS DIRECTED OTHERWISE BY ARCHITECTURAL DOCUMENTATION. IN CASE OF CONFLICTING MOUNTING HEIGHTS THE ARCHITECTURAL DOCUMENTATION SHALL TAKE PRECEDENCE.
- A. RIM HEIGHT OF ALL WALL HUNG LAVATORIES 31" (HANDICAP 34")
 B. LIP HEIGHT OF ALL WALL HUNG URINALS -24" (HANDICAP 17")
- B. LIP HEIGHT OF ALL WALL HUNG URINALS -24" (HANDICAP 17")
 C. RIM HEIGHT OF ALL WALL HUNG WATER CLOSETS -15" (HANDICAP -17")
- D. SPOUT CENTERLINE HEIGHT OF ALL HANDICAP ACCESS EWCS -36"
- 13. RUN OUTS TO FIXTURES SHALL BE:
- A. WATER CLOSETS, $\frac{1}{2}$ ". B. URINALS, 3/4".
- C. LAVATORIES, 3/8".
- D. SINK, 3/8".
 E. MOP BASIN, 1/2".


G. HOSE BIBBS 1/2".

E. MOP BASIN, 1/2".

F. FREEZE PROOF WALL HYDRANTS, 1/2".


SHEET NOTES


- (1) EXTEND FURNACE CONDENSATE DRAINS AND BACKFLOW PREVENTER DRAIN TO FLOOR DRAIN.
- 2) SEE DOMESTIC WATER RISER FOR CONFIGURATION OF WATER PIPING NOT SHOWN ON THE DRAWING
- PIPING SHALL NOT BE INSTALLED ABOVE DRYWALL CEILING. INSTALL PIPE ABOVE LAY-IN CEILING OR IN SOFFIT.
- (4) SEE SITE PLAN FOR CONTINUATION.
- SEE SITE PLAN FOR CONTINUATION.
- 6 NATURAL GAS METER.
- 7 UP IN EXTERIOR WALL, TO ABOVE HARD CEILING.
- B DROP THROUGH CEILING TO FURNACE 3/4' DROPS WITH DIRTLEG, SHUTOFF, AT EACH FURNACE.



CITY OF STANTON

Y HALL & POLICE STATION
STANTON, KENTUCKY

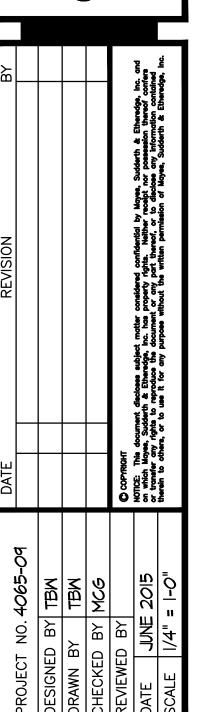

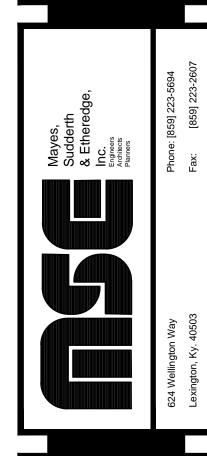

P-1

SHEET